



Dimmable LED Candle

Ordering Information

Model No.	Item name	Chips	Lumens ² (lm)	Watts (w)	CCT ¹ (k)	Efficacy (lm/w)	CRI	Lifetime ³ (h)	Beam Angle	Base type	Voltage (v)	Weight (lb)	Cerification	Equivalent ⁴ (w)
CandleD-3W-30SS-A01	Candle	Samsung	200	3	3000	67	80	35000	/	E12	120	54	UL, FCC	25
CandleD-3W-50SS-A01	Candle	Samsung	230	3	5000	77	80	35000	/	E12	120	54	UL, FCC	25
CandleD-3W-27SS-A01	Candle	Samsung	200	3	2700	67	80	35000	/	E12	120	54	UL, FCC	25

**2 TWO YEARS
WARRANTY**



1. CCT Range complies to ANSI C78.377-2008.

2. Thermally stable typical lumens ($\pm 10\%$)

3. Rated life is based on 70% lumen maintenance, and engineering testing and probability analysis.

4. Equivalency based on the Energy Star® Integral LED Lamp Center Beam Intensity Benchmark Tool.

Note: All Information consistent with IESNA LM-80-08 results and IESNA LM-79-08 testing completed by a qualified third party.


Note: All lamps meet Energy Star® Integral LED Lamp requirements, and will be submitted for testing.

Dimensions

Model	MOL	Diameter
Candle	4.53"	1.46"

Note: Lamp shape conforms to ANSI C78.21-2003.

Note: Designed to comply with RoHS Directive 2002/95/EC.

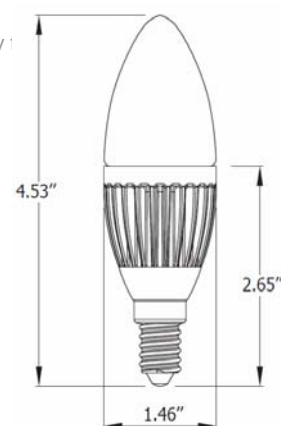

Energy Savings

Model No.	Equivalent	Energy Savings
CandleD-3W-30SS-A01 CandleD-3W-50SS-A01	25W Incandescent	\$85

*Actual Equivalent Replacement, based on the Energy Star® Integral LED Lamp Center Beam Intensity Benchmark Tool.

Note: Energy Savings based on using one bulb for 35,000 hr rated life at 11¢/kWh. Does not include maintenance and replacement lamp savings.

Ordering Guide

CandleD-3W-30SS-A01

CandleD	--	3W	--	30SS	--	A01
Lamp Type		Wattage		CCT + Chip		Structure + Voltage
CandleD = Dimmable Candle		3W = 3 Watts		30SS = 3000K+Samsung		A01= Die-casting + 120V